
FASTRACK®

Engineered To Order Program

Engineer, build, and ship in five weeks for delivery in less than six weeks.

Now you can expect delivery of your 3-phase horizontal, 444 to 449 frame direct connect ETO motors in five weeks rather than eight weeks.

- 3 Phase Horizontal, 444 to 449 frame direct connect products are eligible
- 2, 4, 6, and 8 Pole
- Broad offering of options

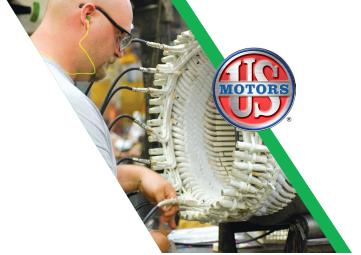

FASTRACK Options

FasTrack Options	Notes	FasTrack Options	Notes
Altitude		Shaft Grounding Rings	
Ambient		High Inertia Load	
Assembly Position (F1, F2, or F3)	Includes Vertical and Wall Mount	Insulation Class	
Balance	Special and Precision	Insulation System	
Bearing Life (Hours)		Leads	
Bearings, Roller		Lugs	
nsulated Bearings (Excluding Ceramic Coated)		Extended (length)	
Brg Caps/Locked Brg		Sealed (Potted) Leads	
Breather/Drains		Positioning Gasket	
Main Conduit Box Size/Const (Excluding SS)		Lifting Lugs	
Accessory Conduit Box/Condulet (Excluding SS)		Multi-Speed	
Cast Iron Fan Cover		Additional Nameplate	
Connection To Load	Direct, Belted, Chain	Special I.D. Nameplate	
Direction Of Rotation		Add. Stamping On Std N/P(ASNP)	
Division 2 Non-Listed		Special Main N/P Data Format	
Dowel Pin Holes		Prints and Data	
Orain Holes, Multiple		Sealant - RTV or Loctite	
Orip Cover		Seals	
Efficiency Class		Service Factor	
Endshields, C-Face		Shafts	
Endshields, D-Flange		Extended (length)	
Enclosure	Excludes explosion proof	Special Shaft Dimensions	
Corro Duty / Severe Duty		Short Commercial Tests (SCT)	Hold for test approval excluded
Tropical Protection		Space Heater and Accessories	Yes, STD only No API or Div 2
Fire Pump Motor		Special Applications	
Frame Footless/Special Feet		Starting Current, Lower than Std	
Foot Flatness, Special		Starting Method	
requency		Temperature Rise	
Grease		Thermal Prot Bearings	Platinum BTD Only
Special	Contact CSR for availability.	Thermal Protection - Windings	Platinum RTD Only, Thermostats 150C
Fittings		Torque, High	
Grounding In Conduit Box		Vertical Jacking Provisions	
Grounding On Frame		Voltage	up to 600V
		Vibration Detectors	Arrange to accommodate only

Max quantities per order

Frame Size	Max Quantity	
444 to 449 Frame	(Mena)	3

*please contact your CSR for capacity review if larger quantities are required.

**If material is not available to meet an order, your CSR will advise the earliest lead time possible within 3 days of placing an order.

Cancellation Policy

No cancellation fee will apply for orders cancelled within the first 3 days of order entry. If there is a lead-time change the customer will have option to cancel within 3 days of notification of revision without penalty. If a FasTrack order is cancelled by the customer on days 4 or 5 a penalty of 70% will be applied. A penalty of 100% will be applied for orders cancelled later than day five.

