


Split Phase Belted Fan and Blower NEMA® 48 Frame, Single and Two Speed




APPLICATIONS:

Designed to meet manufacturer's requirements for belted fans and blowers.

FEATURES:

- Resilient Base
- Class B Insulation Unless Otherwise Noted
- With Threaded Conduit Hole
- Reversible Rotation
- Automatic Reset Thermal Overload Protector
- 208v will not be marked on DOE regulated spread-voltage motors. Refer to online data
- **Discount Symbol: DS-3HAC**

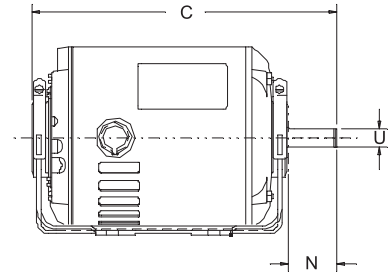

Single Speed, Open Drip Proof

HP	RPM	Voltage	Catalog Number	List	Bearings	NEMA Frame	Amps	Shaft N	Shaft U	Protector	Total C	SF	Ship Wt.	Notes
1/6	1725	115/208-2930	3615	◆	Ball	48	3.6/1.7-1.8	1.5	.500	Auto	8.4	1.35	14	
1/4	1725	115	8000	◆	Ball	48	5.3	1.5	.500	Auto	8.9	1.35	13	77, 79
		115	840CV	◆	Ball	48	5.3	1.6	.500	Auto	9.4	1.35	16	80,81,82
		115/208-230	PD6002	◆	Ball	48	5.2/2.5-2.6	2.25	.500	Auto	10.2	1.35	22	80
		115/208-230	3618	◆	Ball	48Z	5.2/2.5-2.6	1.875	0.500	Auto	9.3	1.35	14	
1/3	1725	115	8100	◆	Ball	48	6.4	1.5	.500	Auto	9.4	1.35	15	77, 79
		115	841CV	◆	Ball	48	6.4	1.6	.500	Auto	9.9	1.35	18	80,81,82
		115/208-230	PD6004	◆	Ball	48	6.6/3.1-3.3	2.25	.500	Auto	10.7	1.35	17	80
1/2	1725	115	8200	◆	Ball	48	8.0	1.5	.500	Auto	10.0	1.25	18	77, 79
		115	1542C	◆	Ball	48	8.0	1.6	.500	Auto	9.9	1.25	21	80
		115/208-230	PD6006	◆	Ball	48	8.6/4.2-4.3	1.9	0.500	Auto	10.7	1.25	22	98,80,81

Two Speed, Open Drip Proof

HP	RPM	Voltage	Catalog Number	List	Bearings	NEMA Frame	Amps	Shaft N	Shaft U	Protector	Total C	SF	Ship Wt.	Notes
1/3-1/6	1725/1140	230	1789	◆	Ball	48	2.9	1.6	.500	Auto	10.4	1.35	22	A

◆ Refer to Motorboss for Pricing

Note 77: With Shaft Adapter For 5/8" Shaft.
 Note 79: Combination Mounting Holes For NEMA® 48 & 56 Frame Dimensions
 Note 80: Canadian Standard — Connected CCWLE (Reversible)
 Note 81: Canadian Standard — May Be Used With Single Pole Single Throw Switch, Not Stocked For US Distribution

Note 82: Open, Ventilated
 Note 98: 50/60 Hz
 Note A: Class A Insulation

