

SERVO MOTOR 115UDB600BFEFA115190-JSAA

115UDB600BFEFA115190-JSAA

HIGH INERTIA MOTOR, 115 PCD MOUNTING HOLES, Ø19 x 40mm OUTPUT SHAFT
(motor derated - torque output from motor limited by output shaft diameter)



Definition

Type	Unimotor HD	
Frame Size (mm)	115	
Voltage	U	400 V
Magnet type	D	High Dynamic
Frame Length	B	
Speed (min ⁻¹)	60	6000
Brake	0	Unbraked
Connection type	B	Power and Signal 90° rotatable (Size 1)
Output shaft	F	Full key & half key supplied in bag
Feedback device code	EF	Inductive EnDat Multi-turn FS (EQI 1331)
Inertia & thermistor	A-JSAA	High inertia + PTC thermistor
PCD	115	115 (FF 115 / 95)
Shaft Diameter	190	19j6 x 40.0 (torque output from motor limited by output shaft dia)
Fan Box	-	
Insulation class	F	
UL Motor / UL Stator	UL Motor / UL Stator	


Nominal characteristics

Motor Ambient Temperature (°C)	40	Drive Fsw (kHz)	12
Motor Stall Torque (N.m)	8.25	Stall Current (A)	10.3
Rated Torque (N.m)	4.8	Nominal Current (A)	6
Motor Peak Torque (N.m)	24.75	Kt (Nm/A)	0.8
Rated Power (kW)	3.0	Ke (V/kmin ⁻¹)	49.0
Winding Thermal Time Constant (s)	164	R (ph-ph) (Ohm)	0.5
Number of Poles	10	L (ph-ph) (mH)	4.5
Typical Cogging (N.m)	0.15		
Inertia (kg.cm ²)	10.8	Weight (kg)	8.3
Ingress Protection Level (IP)	IP65		

Torque / speed graph



SERVO MOTOR 115UDB600BF-EFA115190-JSAA

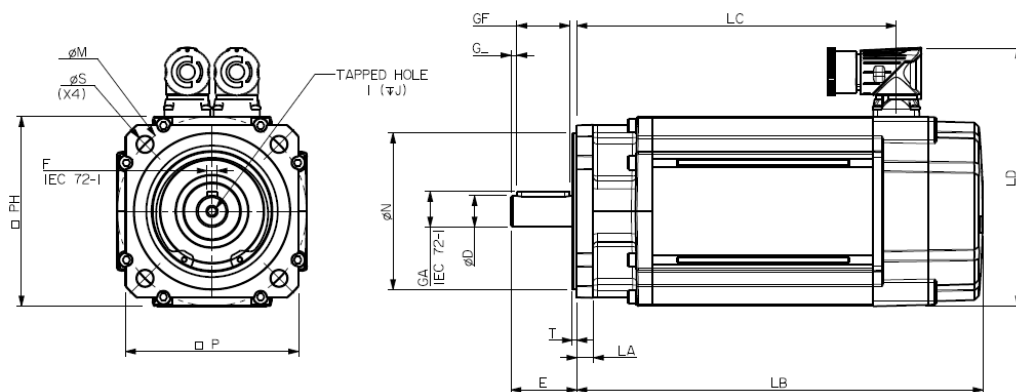Motors ($^{\circ}$ & *mm*)


LB	Total length	256.5
LC	Connector position	216.7
LA	Flange thickness	10.1
T	Register Length	2.8
N	Register Diameter	95.0
LD	Connector overall height	156.5
P	Flange Square	105.0
S	Fixing Hole Diameter	10.0
M	Fixing hole PCD	115.0
PH	Motor Housing Width	115.0
D	Shaft Diameter	19j6
E	Shaft Length	40.0
GA	Key Height	21.5
GF	Key Length	32.0
G	Key to Shaft End	3.6
F	Key Width	6.0
I	Tapped Hole Thread Size	M6 x 1.0
J	Tapped Hole Depth	17.0
	Mounting Bolt	M8

Motor electrical interface Connectors option:

Feedback device code: EF - Inductive EnDat Multi-turn FS (EQI 1331)

- | | |
|------------------------|-------------|
| 1 – Thermistor - | 10 - |
| 2 – Thermistor + | 11 - Data + |
| 3 - Screen (if fitted) | 12 - Data - |
| 4 - | 13 - |
| 5 - | 14 - |
| 6 - | 15 - |
| 7 - | 16 - Power |
| 8 - Clock + | 17 - 0 V |
| 9 - Clock - | Screen |

SINCOS NOT FITTED



Connection type: B - Power and Signal 90° rotatable (Size 1)

