

### SERVO MOTOR 115UDD306BACAA115240-SSAA

#### 115UDD306BACAA115240-SSAA

115 PCD MOUNTING HOLES, Ø24 x 50mm OUTPUT SHAFT  
(motor derated - torque output from motor limited by output shaft diameter)




#### Definition

Type	Unimotor HD	
Frame Size (mm)	115	
Voltage	U	400 V
Magnet type	D	High Dynamic
Frame Length	D	
Speed (min <sup>-1</sup> )	30	3000
Brake	6	Braked
Connection type	B	Power and Signal 90° rotatable (Size 1)
Output shaft	A	With output key
Feedback device code	CA	4096 ppr Incremental encoder (CFS50)
Inertia & thermistor	A	Standard inertia + PTC thermistor
PCD	115	115 (FF 115 / 95)
Shaft Diameter	240	24j6 x 50.0 (torque output from motor limited by output shaft dia)
Fan Box	-	
Insulation class	F	
UL Motor / UL Stator	UL Motor / UL Stator	

#### Nominal characteristics


Motor Ambient Temperature (°C)	40	Drive Fsw (kHz)	12
Motor Stall Torque (N.m)	18.0	Stall Current (A)	11.3
Rated Torque (N.m)	13.6	Nominal Current (A)	8.5
Motor Peak Torque (N.m)	54.0	Kt (Nm/A)	1.6
Rated Power (kW)	4.3	Ke (V/kmin <sup>-1</sup> )	98.0
Winding Thermal Time Constant (s)	175	R (ph-ph) (Ohm)	0.8
Number of Poles	10	L (ph-ph) (mH)	8.7
Typical Cogging (N.m)	0.28		
Inertia (kg.cm <sup>2</sup> )	8.89	Weight (kg)	12.4
Ingress Protection Level (IP)	IP65		
Brake	Type 6	Static Torque (N.m)	16
Release Time (ms)	110	Backlash (°)	3
Brake Supply Voltage (V)	24	Brake Coil Power (W)	23

#### Torque / speed graph

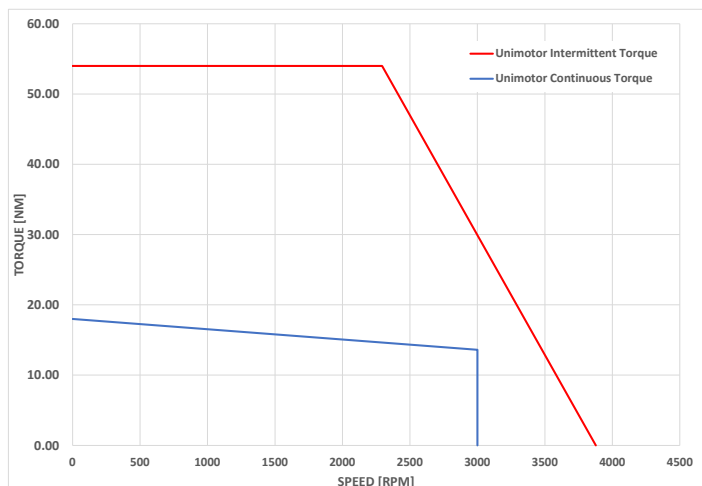

### SERVO MOTOR 115UDD306BACAA115240-SSAA


#### Motors (° & mm)

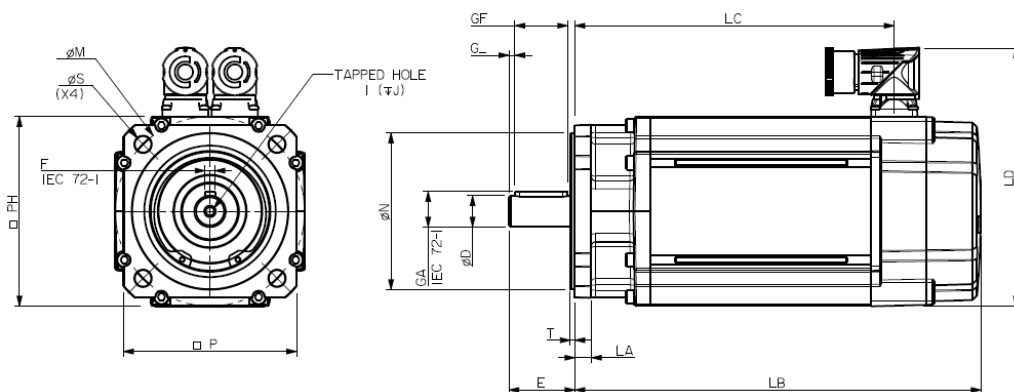

LB	Total length	336.6
LC	Connector position	283.8
LA	Flange thickness	10.1
T	Register Length	2.8
N	Register Diameter	95.0
LD	Connector overall height	156.5
P	Flange Square	105.0
S	Fixing Hole Diameter	10.0
M	Fixing hole PCD	115.0
PH	Motor Housing Width	115.0
D	Shaft Diameter	24j6
E	Shaft Length	50.0
GA	Key Height	27.0
GF	Key Length	40.0
G	Key to Shaft End	5.3
F	Key Width	8.0
I	Tapped Hole Thread Size	M8 x 1.25
J	Tapped Hole Depth	20.0
	Mounting Bolt	M8

#### Motor electrical interface Connectors option:

##### Feedback device code: CA - 4096 ppr Incremental encoder (CFS50)



- |                  |            |
|------------------|------------|
| 1 - Thermistor - | 10 - A     |
| 2 - Thermistor + | 11 - Z     |
| 3 -              | 12 - Z/    |
| 4 - U            | 13 - A/    |
| 5 - U/           | 14 - B     |
| 6 - V            | 15 - B/    |
| 7 - V/           | 16 - Power |
| 8 - W            | 17 - 0 V   |
| 9 - W/           | Screen     |

##### Connection type: B - Power and Signal 90° rotatable (Size 1)

