

SERVO MOTOR 142UDB200BAAEA165240-JSHJ

142UDB200BAAEA165240-JSHJ HIGH INERTIA




Definition

Type	Unimotor HD	
Frame Size (mm)	142	
Voltage	U	400 V
Magnet type	D	High Dynamic
Frame Length	B	
Speed (min-1)	20	2000
Brake	0	Unbraked
Connection type	B	Power and Signal size 1 90° rotatable
Output shaft	A	With output key
Feedback device code	AE	Resolver
Inertia & thermistor	A-JSHJ	High inertia + PTC thermistor
PCD	165	165 (FF 165/130)
Shaft Diameter	240	24j6 x 50.0
Fan Box	-	
Insulation class	F	
UL Motor / UL Stator	UL Motor / UL Stator	

Nominal characteristics



Motor Ambient Temperature (°C)	40	Drive Fsw (kHz)	12
Motor Stall Torque (Nm)	17.4	Stall Current (A)	7.25
Rated Torque (Nm)	15.3	Nominal Current (A)	6.37
Motor Peak Torque (Nm)	52.2	Kt (Nm/A)	2.4
Rated Power (kW)	3.2	Ke (V/kmin-1)	147.0
Winding Thermal Time Constant (s)	240	R (ph-ph) (Ohm)	1.5
Number of Poles	10	L (ph-ph) (mH)	21.0
Typical Cogging (Nm)	0.26		
Inertia (kg.cm²)	31.80	Weight (kg)	13.8
Ingress Protection Level (IP)	IP65		

Torque / speed graph

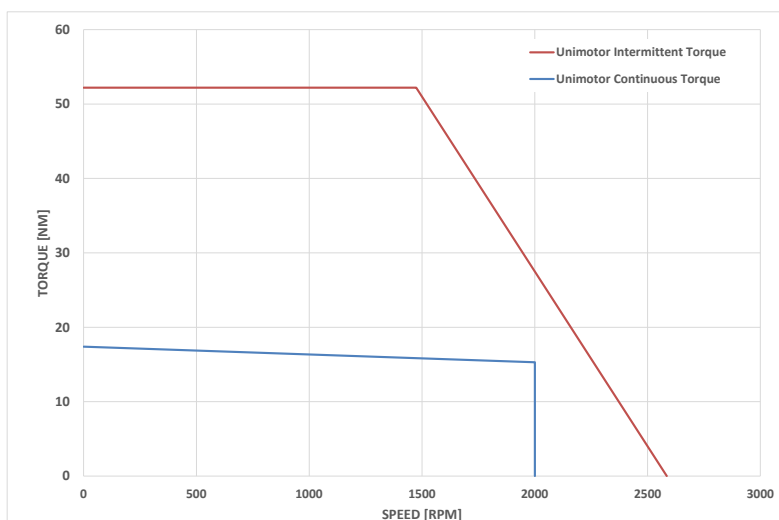

SERVO MOTOR 142UDB200BAEA165240-JSHJ


Motors (° & mm)

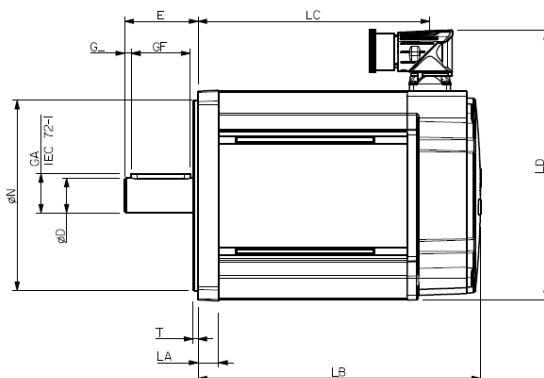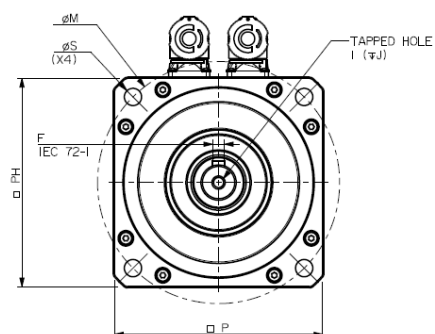

LB	Total length	217.0
LC	Power connector position	182.5
LA	Flange thickness	14.0
T	Register Length	3.4
N	Register Diameter	130.0
LD	Connector overall height	183.5
P	Flange Square	142.0
S	Fixing Hole Diameter	12.0
M	Fixing hole PCD	165.0
PH	Motor Housing Width	142.0
D	Shaft Diameter	24j6
E	Shaft Length	50.0
GA	Key Height	27.0
GF	Key Length	40.0
G	Key to Shaft End	3.0
F	Key Width	8.0
I	Tapped Hole Thread Size	M8 x 1.25
J	Tapped Hole Depth	20.0
	Mounting Bolt	M10

Motor electrical interface Connectors option:

Feedback device code: AE Resolver



- | | |
|------------------|--------|
| 1 - Excit | 9 - |
| 2 - Excit/ | 10 - |
| 3 - COS | 11 - |
| 4 - COS/ | 12 - |
| 5 - SIN | Screen |
| 6 - SIN/ | |
| 7 - Thermistor + | |
| 8 - Thermistor - | |

Connection type: B – Power and Signal size 1 90° rotatable

