

SERVO MOTOR 142UDB306BACAA165240

142UDB306BACAA165240




Definition

Type	Unimotor HD	
Frame Size (mm)	142	
Voltage	U	400 V
Magnet type	D	High Dynamic
Frame Length	B	
Speed (min-1)	30	3000
Brake	6	Braked
Connection type	B	Power and Signal size 1 90° rotatable
Output shaft	A	With output key
Feedback device code	CA	Incremental Encoder CFS50
Inertia & thermistor	A	Standard inertia + PTC thermistor
PCD	165	165 (FF 165/130)
Shaft Diameter	240	24j6 x 50.0
Fan Box	-	
Insulation class	F	
UL Motor / UL Stator	UL Motor / UL Stator	

Nominal characteristics



Motor Ambient Temperature (°C)	40	Drive Fsw (kHz)	12
Motor Stall Torque (Nm)	17.4	Stall Current (A)	11.0
Rated Torque (Nm)	14	Nominal Current (A)	8.75
Motor Peak Torque (Nm)	52.2	Kt (Nm/A)	1.6
Rated Power (kW)	4.4	Ke (V/kmin-1)	98.0
Winding Thermal Time Constant (s)	240	R (ph-ph) (Ohm)	0.6
Number of Poles	10	L (ph-ph) (mH)	8.6
Typical Cogging (Nm)	0.26		
Inertia (kg.cm²)	12.41	Weight (kg)	14.2
Ingress Protection Level (IP)	IP65		
Brake	Braked type 6	Static Torque (Nm)	16
Release Time (ms)	110	Backlash (°)	3
Brake Supply Voltage (V)	24	Brake Coil Power (W)	23

Torque / speed graph

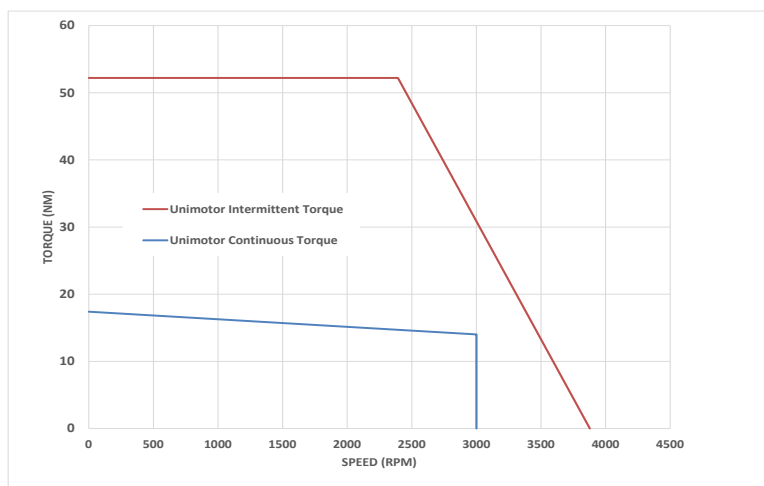

SERVO MOTOR 142UDB306BACAA165240

Motors (° & mm)

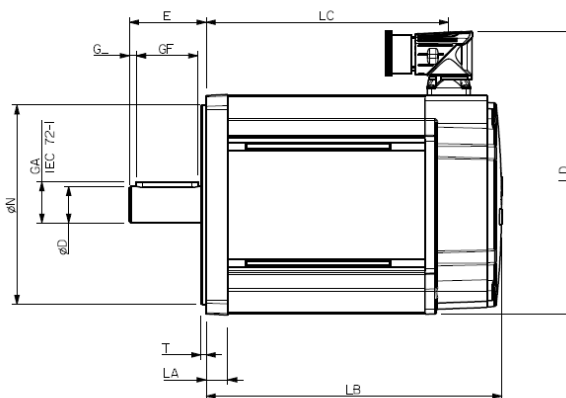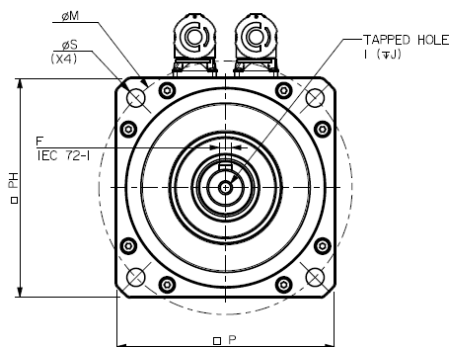


LB	Total length	252.5
LC	Power connector position	218.0
LA	Flange thickness	14.0
T	Register Length	3.4
N	Register Diameter	130.0
LD	Connector overall height	183.5
P	Flange Square	142.0
S	Fixing Hole Diameter	12.0
M	Fixing hole PCD	165.0
PH	Motor Housing Width	142.0
D	Shaft Diameter	24j6
E	Shaft Length	50.0
GA	Key Height	27.0
GF	Key Length	40.0
G	Key to Shaft End	3.0
F	Key Width	8.0
I	Tapped Hole Thread Size	M8 x 1.25
J	Tapped Hole Depth	20.0
	Mounting Bolt	M10

Motor electrical interface Connectors option:

Signal connection: CA - 4096 ppr Incremental encoder (CFS50)

Power connection: B - Power and Signal size 1 90° rotatable



Pin	Function	Pin	Function
1	Thermistor -	10	Channel A
2	Thermistor +	11	Index
3		12	Index Inverse
4	S1	13	Channel A Inverse
5	S1 Inverse	14	Channel B
6	S2	15	Channel B Inverse
7	S2 Inverse	16	+ V
8	S3	17	0 Volts
9	S3 Inverse	Body	Screen

Pin	Colour	Function
1	ORANGE	PHASE U
2	RED	PHASE V
3	GREEN/YELLOW	EARTH
4	YELLOW	PHASE W
5		Brake +
6		Brake -
7	Body	Screen