

Split Phase Belted Fan and Blower NEMA[®] 48 Frame, Single and Two Speed




APPLICATIONS:

Designed to meet manufacturer's requirements for belted fans and blowers.

FEATURES:

- Resilient Base
- Class B Insulation Unless Otherwise Noted
- With Threaded Conduit Hole
- Reversible Rotation
- Automatic Reset Thermal Overload Protector
- **Discount Symbol: DS-3HAC**

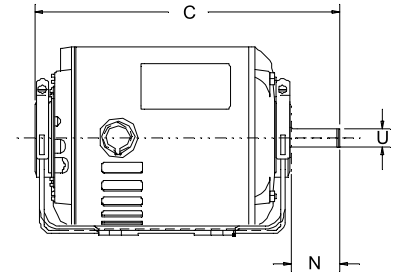

Single Speed, Open Drip Proof

HP	RPM	Voltage	Catalog Number	Bearings	NEMA Frame	Amps	Shaft N	Shaft U	Protector	Total C	SF	Ship Wt.	Notes	List
1/6	1725	115/208-2930	3615	Ball	48	3.6/1.7-1.8	1.5	.500	Auto	8.4	1.35	14		\$133
1/4	1725	115	8000	Ball	48	5.3	1.5	.500	Auto	8.9	1.35	13	77, 79	\$127
		115	840CV	Ball	48	5.3	1.6	.500	Auto	9.4	1.35	16	80,81,82	\$128
	1725	115/208-230	PD6002	Ball	48	5.2/2.5-2.6	2.25	.500	Auto	10.2	1.35	22	80	\$151
		115/208-230	3618	Ball	48Z	5.2/2.5-2.6	1.875	0.500	Auto	9.3	1.35	14		\$136
1/3	1725	115	8100	Ball	48	6.4	1.5	.500	Auto	9.4	1.35	15	77, 79	\$132
		115	841CV	Ball	48	6.4	1.6	.500	Auto	9.9	1.35	18	80,81,82	\$133
	1725	115/208-230	PD6004	Ball	48	6.6/3.1-3.3	2.25	.500	Auto	10.7	1.35	17	80	\$178
1/2	1725	115	8200	Ball	48	8.0	1.5	.500	Auto	10.0	1.25	18	77, 79	\$158
		115	1542C	Ball	48	8.0	1.6	.500	Auto	9.9	1.25	21	80	\$168
	1725	115/208-230	PD6006	Ball	48	8.6/4.2-4.3	1.9	0.500	Auto	10.7	1.25	22	98,80,81	\$219

Two Speed, Open Drip Proof

HP	RPM	Voltage	Catalog Number	Bearings	NEMA Frame	Amps	Shaft N	Shaft U	Protector	Total C	SF	Ship Wt.	Notes	List
1/3-1/6	1725/1140	230	1789	Ball	48	2.9	1.6	.500	Auto	10.4	1.35	22	A	\$404

Note 77: With Shaft Adapter For 5/8" Shaft.

Note 79: Combination Mounting Holes For NEMA[®] 48 & 56 Frame Dimensions

Note 80: Canadian Standard — Connected CCWLE (Reversible)

Note 81: Canadian Standard — May Be Used With Single Pole Single Throw Switch, Not Stocked For US Distribution

Note 82: Open, Ventilated

Note 98: 50/60 Hz

Note A: Class A Insulation