



## Split Phase Evaporative Cooler 6.3" Diameter, Open Drip Proof

### APPLICATIONS:

Designed to meet manufacturer's requirements for belt driven evaporative cooling units.

### FEATURES:

- Ball Bearings
- Class B Insulation
- CW Rotation Shaft End
- Corrosion Resistant Rotor Core and Actuator Assembly
- Industry Standard Hub To Hub Dimension
- Automatic Reset Thermal Overload Protector
- **Discount Symbol: DS-3HAC**

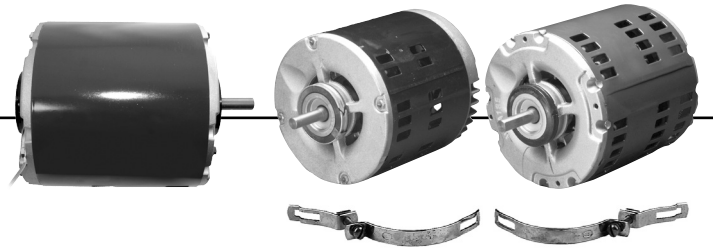

NOTE: For Hub Mounting, Order  
Kit Number 51 and 52.

### Single Speed

HP	RPM	Voltage	Catalog Number	NEMA Frame	Amps	Shaft N	Shaft U	Protector	Total C	SF	Ship Wt.	Notes	List
1/2	1725	115	6768	56Z	8.2	1.6	0.500	Auto	9.4	1	20		\$155
	1725	230	6766	56Z	4.8	1.6	0.500	Auto	9.4	1	19		\$200
3/4	1725	115	6769	56Z	10.7	1.6	0.500	Auto	9.4	1	18	F	\$185
	1725	230	6771	56Z	5.4	1.6	0.500	Auto	9.4	1	20		\$241
1	1725	115/230	5149	56	15.1/7.5	1.9	0.625	Auto	11.8	1	23	35, 60, H39	\$367
2	1725	115/230	7073	56Z	19.0/8.5	2.3	0.875	Auto	13.6	1	36	35, 60, H39	\$429

### Two Speed

HP	RPM	Voltage	Catalog Number	NEMA Frame	Amps	Shaft N	Shaft U	Protector	Total C	SF	Ship Wt.	Notes	List
1/3	1725/1140	115	6767	56Z	5.5	1.6	0.500	Auto	9.4	1	14		\$160
1/2	1725/1140	115	6765	56Z	7.5	1.6	0.500	Auto	9.4	1	16	F	\$167
	1725/1140	230	6795	56Z	4.5	1.6	0.500	Auto	9.4	1	19		\$209
3/4	1725/1140	115	6770	56Z	10.5	1.6	0.500	Auto	9.4	1	19	F	\$231
	1725/1140	230	6796	56Z	5.0	1.6	0.500	Auto	9.4	1	19	F	\$268
1	1725/1140	115	2574	56Z	12.4	1.9	0.625	Auto	11.8	1	35	35, 60, H39	\$360
	1725/1140	230	2423	56Z	7.0	1.9	0.625	Auto	11.8	1	30	35, 60, H39	\$359

### PSC Evaporative Cooler 5.6" Diameter, Open

HP	RPM	Voltage	Catalog Number	NEMA Frame	Amps	Shaft N	Shaft U	Protector	Total C	SF	Ship Wt.	Notes	List
1/8	1075/575	115-127	1129	48Y	2.4	4	0.500	Auto	8.1	1.00	10.5		\$143

Note 35: Includes resilient base

Note 60: Capacitor start

Note H39: Reversible rotation by easy reconnection

Note F: Class F Insulation