



Select Pro[®]

PREPROGRAMMED WITH THE OPTION TO
MATCH THE OEM PROFILE

ECM REPLACEMENT FOR FURNACES AND
AIR HANDLERS



Truck Stock



OEM Direct
Replacement



Programmable
and Tunable in
Operation



Replaces
Thousands of
OEM Models

Improved
Reliability With:



Built-in 6,000 Volt
surge protection



Industry-leading
moisture protection



Integrated
 **Bluetooth[®]**
Technology



Integrated Bluetooth[®] Technology

Preprogrammed,
Ready to install!

No additional
programming tool
required!

To unlock advanced features, download the
RESCUE Select Pro programming app:
• OEM direct programming
• Customized airflow in operation
• Real-time diagnostics

FREE from Google Play or the App store



GET IT ON
Google Play



Download on the
App Store

Google Play and the Google Play logo are trademarks
of Google Inc.; App Store is a trademark of Apple Inc.

SPECIFICATIONS

HORSEPOWER: 1/3, 1/2, 3/4 and 1 HP

VOLTAGE: 1Ø, 115, 208-230 Vac

SPEEDS: Programmable (1075/Var)

ROTATION: Programmable (CCW or CW)

INPUTS: 24Vac, Tap Inputs

HERTZ: 50/60 Hz


OPERATION MODE: Constant Torque

FRAME: NEMA® 48

ENCLOSURE: Open Air Over (OAO)

EFFICIENCY: Up to 82%

MOUNTING: Belly-band

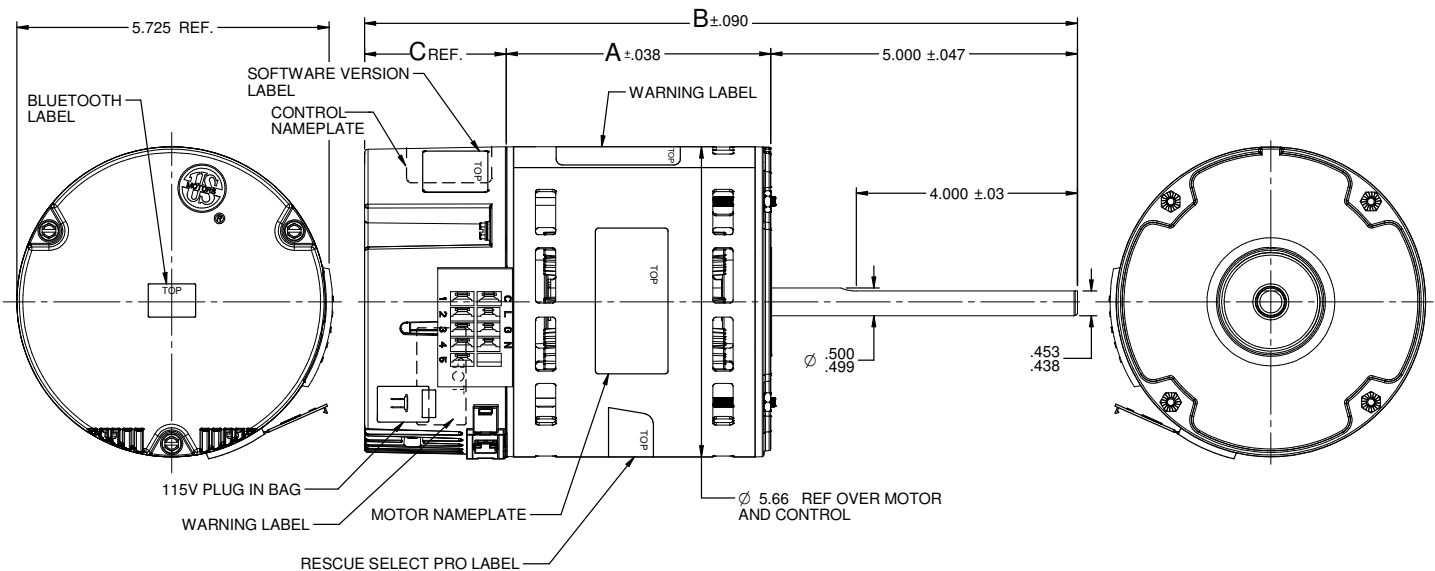

CATALOG NUMBER	HP	VOLTS	AMPS	RPM	DIM. A	DIM. B
6633	1/2 -1/3	115/208-230	6.3/4.0-3.8	1075/Var	3.662	11.225
6643	3/4	115/208-230	9.3/5.8-5.4	1075/Var	4.037	11.6
6653	1	115/208-230	12.4/7.8-7.2	1075/Var	4.412	11.975



8050 W. Florissant Avenue | St. Louis, MO 63136
Phone: 855-487-6686

© Nidec 2025; All Rights Reserved.

25-8510-01 Select Pro PDS

Scan to watch
RESCUE Select Pro
Overview Training Video

