



Enquiry N°: Created by: SB / Checked by: DB Date: 11 Oct 24 (v1)

## SERVO MOTOR - 142UDC300BAAEA165240-JSHJ

# 142UDC300BAAEA165240-JSHJ

## **HIGH INERTIA**


(motor derated - torque output from motor limited by output shaft diameter)



<b>Definition</b>				
Туре	Unimotor HD			
Motor frame size (mm)	142			
Voltage (Vdc)	U	400V		
Magnet type	D	High Dynamic		
Frame Length	С			
Speed (min <sup>-1</sup> )	30	3000		
Brake	0	Unbraked		
Connection type	В	Power and Signal 90° rotatable (size 1)		
Output shaft	Α	With output key		
Feedback device code	AE	Resolver		
Inertia & thermistor	A - JSHJ	PTC thermistor + High inertia		
PCD	165	165 (FF 165/130)		
Shaft Diameter	240	24j6 x 50 (torque output from motor limited by output shaft dia)		
Fan Box	-			
Insulation class	F			
UL Motor / UL Stator	UL Motor / UL Stator			

Motor Characteristics				
Motor Ambient Temperature (°C)	40	Drive Fsw (kHz)	12	
Continuous Stall Torque (Nm)	25.0	Stall Current (A)	16	
Rated Torque (Nm)	18.4	Nominal Current (A)	11.5	
Motor Peak Torque (Nm)	75	Kt (Nm/A) @cold	1.6	
Rated Power (kW)	5.8	Ke (V/kmin-1) @cold	98.0	
Winding Thermal Time Constant (s)	245	R (ph-ph) (Ohm) @ambient	0.3	
Number of Poles	10	L (ph-ph) (mH)	5.3	
Typical Cogging (Nm)	0.38			
Inertia (kg.cm²)	40.1	Weight (kg)	16.6	
Ingress Protection Level (IP)	IP65			

# Torque / Speed Graph

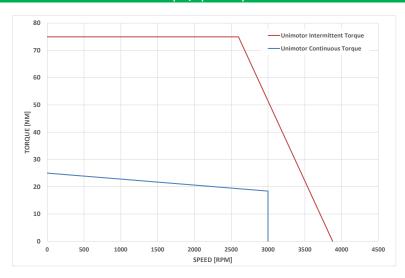

Page **1** of **2** 






Enquiry N°: Created by: SB / Checked by: DB Date: 11 Oct 24 (v1)

## SERVO MOTOR - 142UDC300BAAEA165240-JSHJ

#### Motor Dimensions (mm)

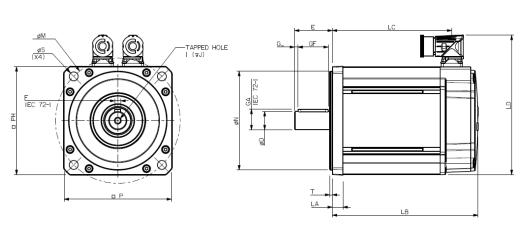



LB	Total length	247.0
LC	Power connector position	212.5
LA	Flange thickness	14.0
T	Register Length	3.4
N	Register Diameter	130
LD	Overall height	183.5
Р	Flange Square	142
S	Fixing Hole Diameter	12
М	Fixing hole PCD	165
PH	Motor Housing Width	142
D	Shaft Diameter	24j6
E	Flange to Shaft End	50
GA	Key Height	27
GF	Key Length	40
G	Key to Shaft End	4.6
F	Key Width	8
1	Tapped Hole Thread Size	M8 x 1.25
J	Tapped Hole Depth	20
	Mounting Bolt	M10

#### Connectors

Signal connection: AE - Resolver

Power connection: B - Power and Signal size 1 90° rotatable



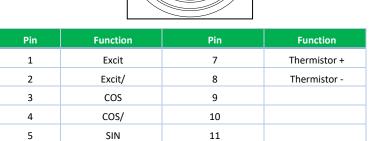

12 Body



Pin	Colour	Function
1	ORANGE	PHASE U
2	RED	PHASE V
3	GREEN/YELLOW	EARTH
4	YELLOW	PHASE W
5		Brake +
6		Brake -
7	Body	Screen

6

SIN/

Screen